


HUSKY[®]

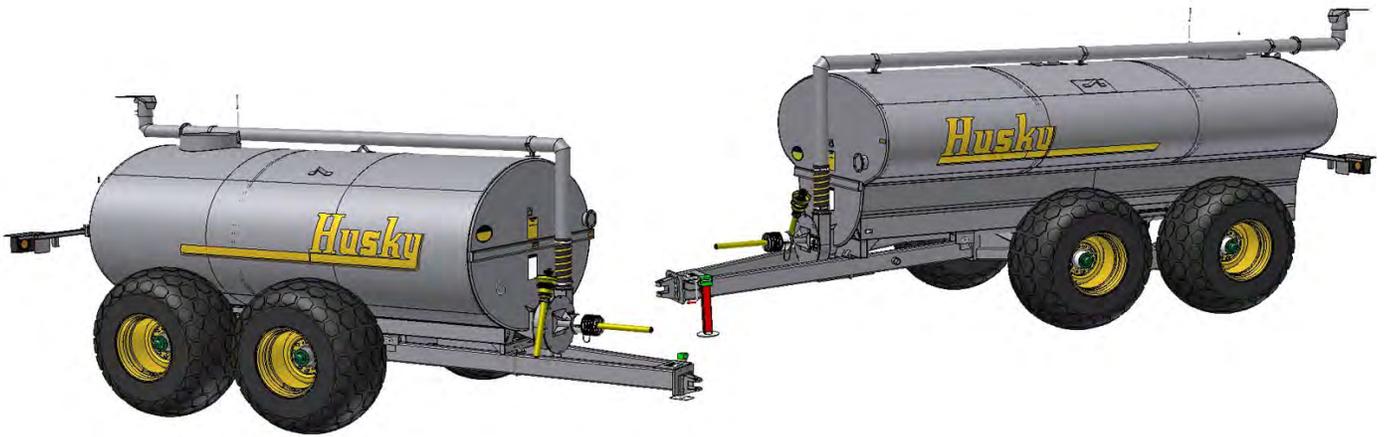

Model 'E' & Slimline
LIQUID MANURE
SPREADER
OPERATOR'S MANUAL

GUARANTEE

All Husky Farm Equipment manufactured by Husky Farm Equipment Limited is guaranteed. Guarantee covers all the replacement cost or repair of all parts said to be defective from manufacture. Guarantee also covers labour installing said parts, if installed at Husky's Manufacturing plant. Time and use is the essence of the guarantee. If equipment is used on a private property for an individual's use, guarantee will be in effect for twelve months from date of invoice. If equipment is used for commercial use to do custom work for money then guarantee will be in effect for three months only from date of invoice.

EXEMPTIONS FROM GUARANTEE

Cost of transportation of equipment to or from Husky Farm Equipment Limited either by customer or by Husky's service staff or cost of mail or of public transportation is not covered. Tires and electric or hydraulic motors are covered by manufacturer's warranty and although Husky may assist to get warranty, Husky will not be responsible other than that allowed by manufacture's warranty. Items subject to normal wear from use not covered by guarantee if faulty part is simply worn.


TABLE OF CONTENTS

SECTION	DESCRIPTION	PAGE
	Serial Number Location	04
1	Introduction.....	05
2	Safety.....	06
2.01	General Safety.....	07
2.02	Operating Safety.....	08
2.03	Maintenance Safety.....	08
2.04	Hydraulic Safety.....	09
2.05	Transport Safety.....	09
2.06	Manure Storage Facility.....	10
2.07	Storage Safety.....	10
2.08	Tire Safety.....	10
2.09	Safety Decals.....	10
2.10	Sign-Off Form.....	11
3	Safety Decal Locations.....	12
4	Operation.....	13
4.01	To the New Operator Or Owner.....	13
4.02	How The Machine Works.....	13
4.03	Break - In.....	14
4.04	Pre-Operation Checklist.....	14
4.05	Equipment Matching.....	15
4.06	Attachment to Tractor.....	16
4.07	Loading the Spreader.....	17
4.08	Transporting.....	17
4.09	Unloading the Spreader.....	18
4.10	Clean-Up.....	19
4.11	Storage.....	19
	4.11.1 Placing In Storage.....	19
	4.11.2 Removing From Storage.....	20
5	Service and Maintenance.....	21
5.01	Service.....	21
	5.01.1 Fluids and Lubricants.....	21
	5.01.2 Greasing.....	21
	5.01.3 Servicing Intervals.....	22
	5.01.4 Service Record.....	23
5.02	Maintenance.....	24
	5.02.1 PTO Safety Shield Maintenance.....	24
	5.02.2 PTO Driveline Shear Pin.....	24
	5.02.3 Unloading Fan Maintenance.....	25
	5.02.4 Greasing Wheel Bearings.....	25
6	Trouble Shooting.....	26
7	Specifications.....	26
7.01	Mechanical—Elite.....	26
7.02	Mechanical—Slimline.....	27
7.03	Tire Options.....	27
7.04	Wheel Bolt Torque.....	27
8	Index.....	28
9	Parts Book.....	28

SERIAL NUMBER LOCATION

Always give your dealer the serial number of your Husky Liquid Manure Spreader when ordering parts or requesting service or other information.

The serial number plate(s) is located where indicated. Please mark the number in the space provided for easy reference.

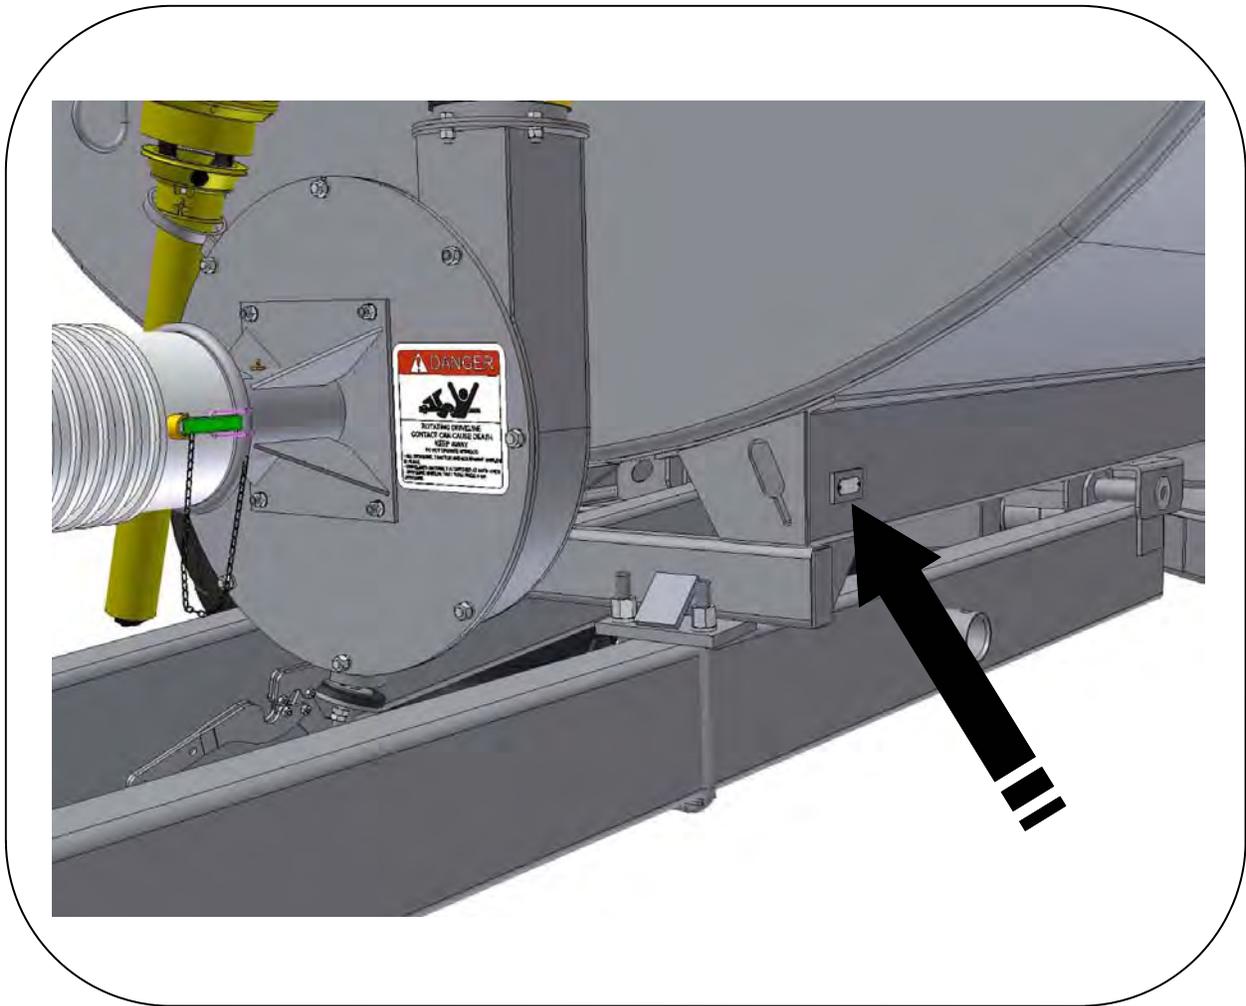

SERIAL NUMBER LOCATION

Model Type _____

Serial Number _____

Production Year _____

1 INTRODUCTION

Congratulations on your choice of a Husky Liquid Manure Spreader to compliment your farming operation. This equipment has been designed and manufactured to meet the need of most discerning operators. The highest quality components are used throughout, and each step of Husky manufacturing is inspected under strict quality control.

Safe, efficient and trouble-free operation of your Husky Liquid Manure Spreader requires that you and everyone else who will be operating or maintaining the machine read and understand all of the safety, operation, maintenance and trouble shooting information contained within this Operator's Manual.

Keep this manual handy for frequent reference and to pass on to new operators or owners. Call your Husky Dealer if you need assistance, information or additional copies of the manuals.



OPERATOR ORIENTATION

The directions left, right, front and rear, as mentioned throughout the manual, are as seen from the tractor driver's seat and facing in the direction of travel.

2 SAFETY

SAFETY ALERT SYMBOL

This Safety Alert Symbol Means
**ATTENTION! BECOME ALERT
YOUR SAFETY IS
INVOLVED**



The Safety Alert symbol identifies important safety messages on the Husky Liquid Manure Spreader and in this manual. When you see this symbol, be alert to the possibility of personal injury or death. Follow the instructions in the safety message.

Why is SAFETY important to you?

3 Big Reasons

**Accidents Disable and Kill
Accidents Cost
Accidents Can Be Avoided**

SIGNAL WORDS:

Note the use of the signal words **DANGER**, **WARNING** and **CAUTION** with the safety messages. The appropriate signal word for each message has been selected using the following guidelines

- DANGER** - An immediate and specific hazard which **WILL** result in severe personal injury or death if the proper precautions are not taken.
- WARNING** - A specific hazard or unsafe practice which **COULD** result in severe personal injury or death if the proper precautions are not taken.
- CAUTION** - Unsafe practices which **COULD** result in personal injury if the proper practices are not taken, or as a reminder of good safety practices.

SAFETY

YOU are responsible for the SAFE operation and maintenance of your Husky Liquid Manure Spreader. **YOU** must ensure that you and anyone else who is going to operate, maintain or work around the Liquid Manure Spreader be familiar with the operating and maintenance procedures and related **SAFETY** information contained in this manual. This manual will take you step-by-step through your working day and alerts you to all good safety practices that should be adhered to while operating this equipment.

Remember, **YOU** are the key to safety. Good safety practices not only protect you but also the people around you. Make these practices a working part of your safety program. Be certain that **EVERYONE** operating this equipment is familiar with the recommended operating and maintenance procedures and follows all the safety precautions. Most accidents can be prevented. Do not risk injury or death by ignoring good safety practices.

Spreader owners must give operating instructions to operators or employees before allowing them to operate the Husky Liquid Manure Spreader and at least annually thereafter per OSHA regulation 1928.57.

Husky Liquid Manure Spreader owners must follow safety practices as recommended by the Agriculture Safety Associations across Canada .

The most important safety device on this equipment is a SAFE operator. It is the operator's responsibility to read and understand ALL Safety and Operating instructions in the manual and to follow these. All accidents can be avoided.

A person who has not read and understood all operating and safety instructions is not qualified to operate the machine. An untrained operator exposes themselves and bystanders to possible serious injury or death.

Do not modify the equipment in any way. Unauthorized modification may impair the function and/or safety and could affect the life of the equipment.

Think SAFETY! Work SAFELY!

2.01 GENERAL SAFETY

1. Read and understand the Operator's Manual and safety signs before operating, maintaining, adjusting or unplugging the Manure Spreader.



2. Have a first aid kit available for use should the need arise and know how to use it.



3. Have a fire extinguisher available for use should the need arise and know how to use it.



4. Install and properly secure all shields and guards before operating.

5. Do not allow riders on the machine or tractor.

6. Stop tractor engine, disengage PTO clutch, set park brake, remove ignition key and wait for all moving parts to stop before servicing, adjusting, repairing or unplugging.

7. Never enter manure storage facility without appropriate respiratory equipment and an independent oxygen supply.

8. Review safety related items with all operators annually

2.02 OPERATING SAFETY

1. Read and understand the Operator's Manual and all safety signs before operating, servicing, adjusting or unplugging.
2. Do not allow riders on the Husky Liquid Manure Spreader or the tractor during operation, transport or filling.
3. Do not operate a PTO driven system unless the required shields are in place and secured.
4. Never wear loose fitting clothing, keep hands, feet, hair and clothing away from all moving and/or rotating parts, while working with machinery, use personal protective clothing and eye and ear protection as needed.
5. Stop tractor engine, disengage PTO clutch, set park brake, remove ignition key and wait for all moving parts to stop before servicing, adjusting, repairing or unplugging.
6. Before applying hydraulic pressure to the system, make sure everyone is clear and that all connections are tight and all components are in good repair.
7. Never enter manure tank or manure storage facility without wearing appropriate breathing gear that carries an independent supply of oxygen.
8. Always use a tractor of sufficient size and weight to maintain vehicle stability during transport and during use.
9. Clean or install reflectors and SMV emblem before transporting and add extra lights for transporting during times of limited visibility.
10. Install the optional brakes if Liquid Manure Spreader is to be used on hilly terrain.
11. Review all safety instructions annually.

Think SAFETY! Work SAFELY!

2.03 MAINTENANCE SAFETY

1. Read and understand all the information contained in the Operator's Manual regarding maintenance, adjusting and operating Husky Liquid Manure Spreader.
2. Block the frame up securely and firmly if adjustments and maintenance to the Liquid Manure Spreader require raising the wheel and tire assemblies off the ground.
3. Exercise extreme caution when working around or with high-pressure hydraulic systems. Depressurize the system when connecting or disconnecting the hose couplers.
4. Wear heavy gloves and eye protection when searching for suspected hydraulic leaks. A high-pressure concentrated stream of hydraulic fluid can pierce the skin. If such an event happens, seek immediate medical attention as infection and toxic reaction could develop.
5. Do not attempt any adjustment or maintenance to any system of the Husky Liquid Manure Spreader when the implement is in motion.
6. Be very careful and exercise extreme caution when working around or near a rotating PTO shaft.
7. Do not operate PTO system unless the rotating shield and all other guards are in place.
8. Never wear ill-fitting, baggy or frayed clothing and never have unkempt long hair when working around or on any of the drive system components.
9. Stop the engine, place all controls in neutral, remove the ignition key, set the park brake and wait for all moving parts to stop before servicing, adjusting, repairing or unplugging any system or component.
10. Never enter tank or manure storage facility without wearing appropriate breathing gear that carries an independent supply of oxygen. The buddy system is also a recommended procedure.
11. Do not use the jack stand to support the hitch when the tank is full.

2.04 HYDRAULIC SAFETY

1. Make sure that all components in the hydraulic system are kept in good condition and are clean.
2. Replace any worn, cut, abraded, flattened or crimped hoses and metal lines.
3. Do not attempt any makeshift repairs to the hydraulic lines, fittings or hoses by using tape, clamps or cements. The hydraulic system operates under extremely high-pressure; 1600 to 2300 pounds per square inch. Such repairs will fail suddenly and create a hazardous and unsafe condition.

4. Wear proper hand and eye protection when searching for a high-pressure hydraulic leak. Use a piece of wood or cardboard as a backstop instead of hands to isolate and identify a leak.



5. If injured by a concentrated high-pressure stream of hydraulic fluid, seek medical attention immediately. Serious infection or toxic reaction can develop from hydraulic fluid piercing the skin surface.
6. Before applying pressure to the system, make sure all components are tight and that lines, hoses and couplings are not damaged and kept in good repair.
7. Make sure all hydraulic hoses are not snagged on anything

2.05 TRANSPORT SAFETY

1. Make sure you are in compliance with all local regulations regarding transporting agricultural equipment on public roads and highways. Consult your local law enforcement agency for further information.
2. Ensure that the SMV (Slow Moving Vehicle) emblem and all reflectors and lights required by the local highways and transport authorities are in place and are clean and visible by overtaking and oncoming traffic.
3. Do not allow anyone to ride on the Spreader or tractor during transport.
4. Ensure that the Husky Liquid Manure Spreader is hitched positively and safely to the tractor drawbar. Use proper safety chain to secure a safe hitch hookup when transporting.
5. Transport according to local regulations covering maximum width, weight and length.
6. Do not exceed 32 km/hr (20 mph). Reduce speed on rough roads and surfaces.
7. Always use a tractor of sufficient size and weight to maintain vehicle stability during transport.
8. Always shift tractor down into a lower gear when going down hills with a full tank to use the engine retarding force and to maintain vehicle stability.
9. Install the optional hydraulic brake package if used on hilly terrain.
10. Always use hazard warning flashers on tractor when transporting unless prohibited by law.

Think SAFETY! Work SAFELY!

2.06 MANURE STORAGE

FACILITY SAFETY

1. Never enter tank or manure storage facility without wearing appropriate breathing gear that carries an independent supply of oxygen .
2. Keep others, especially children, out of these structures.
3. Use special care when opening storage facilities to prevent yourself or others from falling in.
4. Stored manure gives off hydrogen sulfide gas. One breath can kill. Keep away. Keep others away.



5. Do not enter storage facility without oxygen supplying equipment. The surface always crusts and looks solid. It is not. Stay away.
6. Set and adjust agitator before placing in pit. Never enter pit to unplug. Remove first.
7. Always have a ladder in storage tank as a means of getting out should you inadvertently fall in.

2.07 STORAGE SAFETY

1. Store the Husky Liquid Manure Spreader on a firm, level surface.
2. Store away from areas of human activity. Do not permit children to play on or around the stored Liquid Manure Spreader.
3. Make sure the unit is sitting, or blocked up firmly and solid and will not tip or sink into a soft area.

2.08 TIRE SAFETY

1. Failure to follow proper procedures when mounting a tire on a wheel or rim can produce an explosion which may result in serious injury or death.
2. Do not attempt to mount a tire unless you have the proper equipment and experience to do the job.
3. Have a qualified tire dealer or repair service perform required tire maintenance.
4. Check wheel bolt torque daily.

2.09 SAFETY DECALS

1. Keep safety decals and signs clean and legible at all times.
2. Replace safety decals if destroyed, missing, painted over or unreadable.
3. If a section of the Spreader is replaced that carries a safety decal, apply a new decal immediately.
4. Safety decals or signs are available from your Dealers Parts Department.


HOW TO INSTALL SAFETY DECALS:

- Be sure that the installation area is clean and dry.
- Decide on the exact position before you remove the backing paper.
- Remove the smallest portion of the split backing paper.
- Wash area with soapy water and install decal while still soapy, then it can be smoothed out easily.
- Place the sign in position and slowly peel back the remaining paper, smoothing the sign as it is applied.

3 SAFETY DECAL LOCATION

The types of decals on the equipment are shown in the illustration below. Good safety requires that you familiarize yourself with the various Safety Decals, the type of warning and the area, or particular function related to that area, that requires your SAFETY AWARENESS.

Think SAFETY! Work SAFELY!

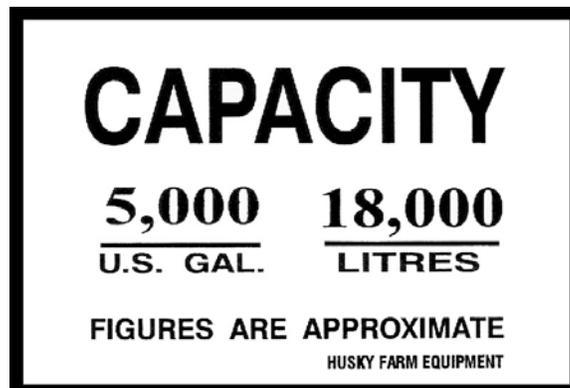

REMEMBER - If safety decals have been damaged, removed, become illegible or parts replaced without decals, new decals must be applied. New decals are available from your authorized dealer.

4 OPERATION

4.01 TO THE NEW OPERATOR OR OWNER

Husky Farm Equipment's Liquid Manure Spreaders are designed to efficiently transport liquid manure from the storage facility to the field where it is spread. Many of the features incorporated into this machine are the result of suggestions made by customers like you. Read this manual carefully to learn how to operate the machine safely and how to set it to provide maximum efficiency. The manual will take you step-by-step through your working day. By following the operating instructions in conjunction with a good maintenance program, your Husky Liquid Manure Spreader will provide many years of trouble-free service.

4.02 HOW THE MACHINE WORKS

The Husky Liquid Manure Spreader is a large steel tank with one or more internal baffles, that is used to transport liquid manure from its storage facility to the field. Liquid manure enters the tank through the top fill hole. A pump on the front of the tank draws the slurry out of the tank and forces it through the discharge tube. A splash plate positioned at the end of the discharge tube deflects and scatters the material to spread it evenly over a 40ft wide path.

OPTIONAL EQUIPMENT:

- Hydraulic Brakes
- Hydraulic Driven Fan
- Sight Gauge Kit
- Butterfly Lid or Slide Lid Kit
- Flow Monitor
- Swing Open Fan
- In Tank Agitation
- Low Discharge Kit
- Injectors

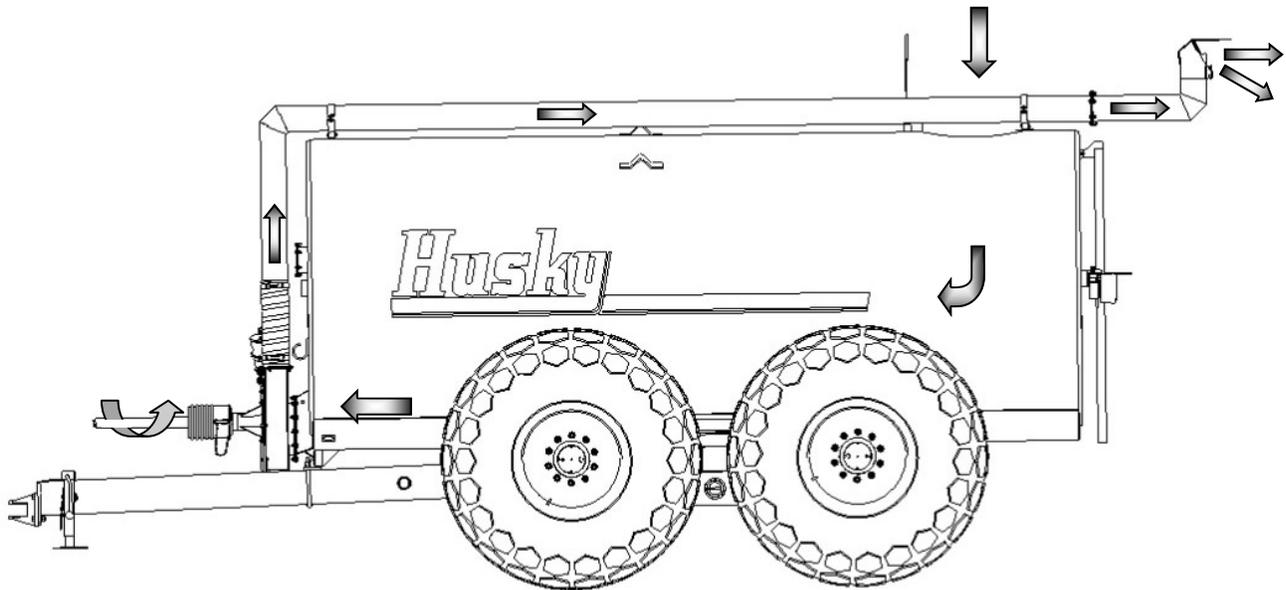


FIG. 1 PRINCIPLES OF OPERATION

4.03 BREAK-IN

Although there are no operational restrictions on the Spreader when it is new, there are some mechanical checks that must be done to insure long term integrity of the unit. When using the Spreader for the first time, follow this procedure:

A. Before Using

1. Lubricate all grease points.
2. Re-torque wheel bolts to the values listed in Maintenance section.

B. After 5 miles on the road or 15 minutes in the field:

1. Retorque wheel bolts to the specified values listed in Maintenance section.
2. Check all hardware. Tighten as required.

C. After 40 and 100 miles on the road or 2 hours and 5 hours of use

1. Retorque wheel bolts to the specified values.
2. Check all hardware. Tighten as required.
3. Lubricate all grease points.
4. Then go to the service schedule as outlined in the maintenance schedule.

IMPORTANT

It is very important the the wheel bolts be torqued per section 7.03 when the machine is new. Paint that was applied during the manufacturing process will come out of the joint between the nut and the hub and reduce the torque level. Nuts must be retorqued to the specified value to insure machine integrity. Failure to maintain wheel bolt torque may void axle warranty.

4.04 PRE-OPERATION CHECKLIST

Efficient and safe operation of the Husky Liquid Manure Spreader requires that each operator reads and understands the operating procedures and all related safety precautions outlined in this section. A pre-operation checklist is provided for the operator. It is important for both personal safety and maintaining the good mechanical condition of the Spreader that this checklist be followed.

1. Lubricate the machine per the schedule outlined in the "Maintenance Section".
2. Use only a tractor of adequate power and weight to operate the Spreader.
3. Ensure that the machine is properly attached to the tractor using a drawbar pin and a retainer such as a pin made for draw bolts is installed.
4. Ensure that the PTO driveline is securely attached on both ends, that there is proper overlap in length so that the PTO won't come apart or jam up when turning.
5. Check that PTO shields are in place and that it can rotate freely and telescope freely. Secure the PTO shield safety chain (if supplied) to the PTO guards.
 - A. Inspect all hydraulic lines, hoses , fittings and connectors. Tighten any loose fittings and replace any damaged components.
 - B. Use a clean cloth to wipe any accumulated dirt from the couplers before connecting to the tractor's hydraulic system.
 - C. Be sure the hydraulic reservoir in the tractor is filled to the required specification.
 - D. Be sure the tractor hydraulic system specifications match the requirements of the motors & cylinders
6. Check the tires and ensure that they are inflated to the specified pressure (See Specifications Section). Check the wheel bolt torques. Be sure to re-torque as required to the specified level.
7. Be sure that any lights, reflectors or SMV signs if installed are clean.

4.05 EQUIPMENT MATCHING

Special attention must be given to selecting a tractor with sufficient power to safely maneuver and run the Spreader. A machine of this type is substantially heavier when loaded as compared to when it is empty. The tractor size and weight must be matched to the weight of the spreader when it is loaded.

As a general guideline, Table 1 lists the minimum horsepower requirements for the tractor when the unit is being used on level terrain.

APPROX GALLONS (US)	APPROX. LITRES (L)	RECOMMENDED TRACTOR HORSEPOWER CLASS
1200	4500	60 HP
1800	7000	75 HP
2400	9000	90 HP
3000	12000	100 HP
3600	14000	130 HP
4000	15000	140 HP
5000	18000	160 HP
6000	23000	200 HP
7400	28000	200+ HP

TABLE 1 TRACTOR HORSEPOWER REQUIREMENTS

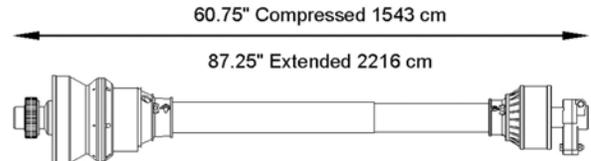


FIG. 2 DRIVELINE DIMENSION

When the Spreader is being used on hilly terrain, it is recommended that the tractor size be increased by 2 classes and the optional hydraulic brakes be installed.

The standard fan on the Spreader requires an input speed of 540 RPM for unloading. The standard PTO shaft is equipped with a 1 3/8\" 6 spline yoke. And optional 1000 RPM fan and PTO shaft is available by special order from the factory.

To insure there is sufficient space to allow the PTO shaft to telescope during turns and when going over rough terrain, the dimension between the end of the tractor shaft and the end of the yoke on the compressed driveline must be 14 inches (355mm)

If the dimension varies by more than 3 inches (76 mm) adjust the tractor drawbar. (Refer to tractor manual for details.)

Hydraulic system:

If using a fan that is powered by the tractors hydraulic system, make sure that the system is set to supply the specified volume and pressure for the fan motor. If you have any questions about the type of hydraulic system in the tractor or it's output, consult the tractor Operators Manual. The fan motor requires 20 gpm (75 L/minute) flow at 2000 psi pressure.

4.06 ATTACHMENT TO TRACTOR

The Spreader should always be parked on a level, dry area that is free of debris and foreign objects. Follow this procedure when attaching.

1. Clear the area of bystanders and remove foreign objects from the machine and work areas.
2. Make sure there is sufficient room to back the tractor up to the hitch point.
3. Start the tractor and slowly back it up to the hitch.
4. Stop the tractor engine, place all controls in neutral, set park brake and remove ignition key before dismounting.
5. Use the jack to raise or lower the hitch to the desired height.

IMPORTANT

Use a hardened drawbar pin with a minimum diameter of 1 inch (25mm). Larger pins should be used with the larger models to insure adequate shearing strength when subjected to the dynamic loads seen in the field and during transport.

6. Install a drawbar pin that has provisions for a mechanical retainer such as a Lynch Pin.
7. Attach a safety chain with a minimum of 10,000 lbs (4500 kg) strength. Be sure it is routed to prevent binding when making turns.
8. Before connecting the PTO driveline, make sure that it telescopes easily and the the shield rotates freely.
9. Install the PTO driveline by pulling back on the collar and sliding the yoke over the shaft. Release collar as soon as the splines engage. Slide the yoke over the shaft until the pin locks into position. Pull on the yoke to make sure the pin is firmly seated in it's groove to prevent unexpected separation.
10. If the fan is powered by a hydraulic motor, connect the hydraulics by following this procedure:
 - a. Use a clean rag to wipe away any accumulated dirt on the couplers and on the tractor.
 - b. Push the male end into the tractor coupling.

- c. Be sure the coupler is secured in position.
 - d. Route the hoses along the hitch to prevent binding, dragging or tangling
11. Lower the jack and transfer the weight of the hitch to the drawbar.
 12. Check the angle of the hitch with the weight resting on the drawbar. Husky Spreaders unload from the front of the tank. The hitch and frame should be sloped toward the front to assure easy unloading. The hitch plate can be adjusted to provide the required angle.

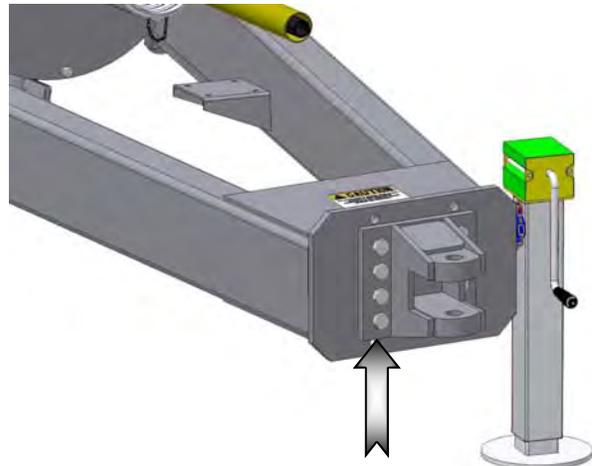


FIG. 3 HITCH ADJUSTMENT

13. Raise the jack base up so jack is fully retracted. Remove jack from mounting sleeve and place in the secondary mounting sleeve, located further up the tongue. Rotate the jack 90° and install mounting pin.
14. Review and follow the items listed in the Pre-Operation checklist before using.

NOTE:

Rotate hitch when it becomes worn


4.07 LOADING THE SPREADER

The Spreader is loaded with liquid manure slurry through the manhole on the top of the tank. When loading follow this procedure:

1. Clear the area of bystanders, especially small children, and be sure the loading area is free of foreign objects.
2. Make sure there is sufficient room to back the unit into the loading position.
3. Review and follow the Pre-Operation checklist before using.
4. Start the tractor and slowly position the Spreader under the loading spout.
5. Stop the tractor engine, place all controls in neutral, remove ignition key and wait for all moving parts to stop before dismounting.

IMPORTANT

Be sure the material in the storage facility has been well mixed and is in a consistent slurry.

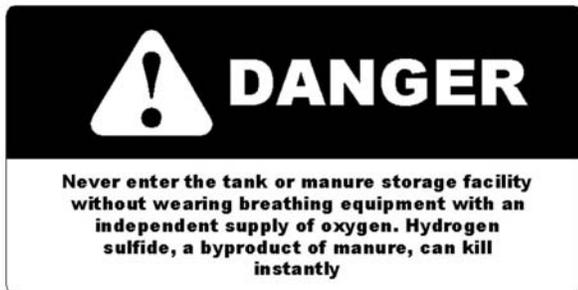

6. Use the pit or lagoon pump to fill the Spreader.
7. It normally takes 1 1/2 to 2 minutes to fill the spreader depending on the size of Spreader and the Pump.
8. It is not recommended that the Spreader be overfilled. This will make a mess in the loading area and cause spilling on the tank and road when transporting.
9. If your tank is equipped with a sight gauge level indicator, watch it while filling to monitor the fill rate. Splashes out of the manhole also indicate the tank is almost full.
10. Stop the pump when the tank is full.

4.08 TRANSPORTING



Use this procedure when transporting:

1. Clear the area of bystanders, especially small children, before starting.
2. Be sure that the wheel bolts are torqued to the specified level and that the tire pressure is to the specifications.
3. Be sure a drawbar pin and retainer are used.
4. Be sure a safety chain is installed and secured at both ends.
5. Clean the SMV sign and all lights and reflectors.
6. If spreader is equipped with lights ensure they are in working order. Lights are recommended to be used at all times.
7. Do not allow riders on the Spreader or tractor at any time.
8. Start the loaded Spreader slowly to reduce the load on the drive train.
9. If your machine is equipped with hydraulic brakes, the brakes will not release unless the hydraulic lever is held momentarily in the opposite direction. This will relieve the system pressure and the brakes will release. (Note: The above does not apply if the spreader is equipped with Knott Hydraulic Braking System)
10. Always maintain a safe travel speed on rough roads or terrain and when going down hills or making turns.

- Never tow the loaded machine faster than 32 km/h (20 mph). The ratio of tractor weight to spreader weight plays an important role in defining acceptable travel speed. Table 2 summarizes the weight ratio to travel speed.

Table 2 Speed vs Weight Ratio	
<u>Road Speed</u>	<u>Weight of fully equipped or loaded implement(s) relative to weight of towing machine</u>
Up to 32 km/h (20 mph)	1 to 1, or less
Up to 16 km/h (10 mph)	2 to 1, or less
Do not tow	More than 2 to 1

Refer back to Table 1 to determine the minimum horsepower requirements recommended for level land. Increase tractor size 2 class for operation on hilly terrain.

- Always shift to a lower gear when going down hills to use the engine as a retarding force.
- Apply the tractor brakes carefully to prevent jackknifing.
- Never disengage tractor drive train and coast down hills. Always keep tractor in gear.
- Keep to the right and yield the right-of-way to allow faster traffic to pass. Drive on the road shoulder if permitted by law.

4.09 UNLOADING THE SPREADER

When unloading, follow this procedure:

- The Spreader will evenly cover a 40 foot (12 meter) span. Space your driving accordingly.
- When moving engage the PTO or hydraulics to operate the unloading fan. Be sure to set the throttle to give the rated engine RPM to insure effective spreading of the slurry.
- Much of the fertilizing value of manure is lost when exposed to the air. Getting the manure covered quickly is a very important part of spreading manure.
- It is recommended that a moldboard plow or disc harrows be used to cover the manure as soon as possible.
- Since manure smells, it can make unfriendly neighbours. Covering it quickly can reduce the emission of odors. In a residential area, it is recommended that the customer use an injector to bury the smell.
- Never unhook the tractor from a loaded Spreader. The hitch jack has not been designed to support the heavy load.

4.10 CLEAN-UP

At the end of each working day, follow this procedure to clean the machine:

1. Wash the outside of the Husky Liquid Manure Spreader with a hose or pressure washer.

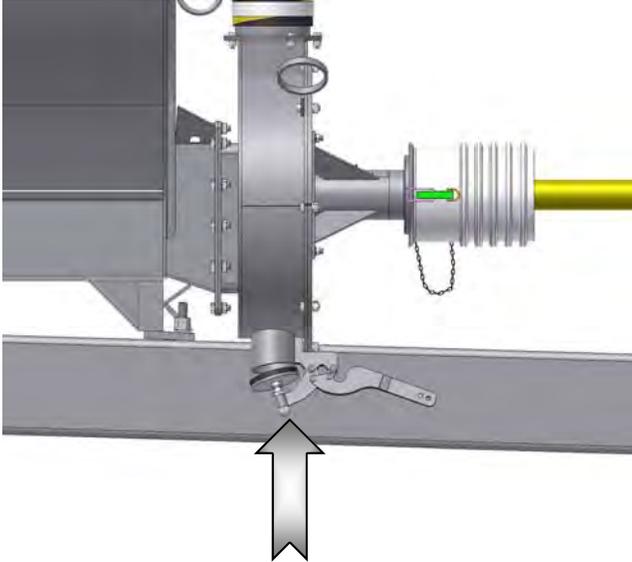


FIG. 4 DRAIN PLUG


2. Unlatch the drain plug on the bottom of the fan housing.
3. Wash the inside of the tank using a water hose or pressure washer. Be sure the front is lower than the rear to allow the water to drain out.
4. Direct the water into the discharge tube to clean the tube and the fan.
5. If the temperatures are below freezing, be sure the water has a chance to drain.
6. Latch drain plug.
7. It is important to wash the machine after use to prevent acids from the manure from working on the Spreader. A clean machine lasts much longer.
8. When cleaning at the end of the season, a more thorough cleaning and inspection is required (Refer to Section 4.11)

4.11 STORAGE

4.11.1 PLACING IN STORAGE

After the season's use, inspect all systems of the Husky Liquid Manure Spreader. Repair or replace any worn or damaged components to prevent any down time at the beginning of the next season. Since the machine works with manure, it is necessary to thoroughly wash the unit to prevent manure acids from working on the components while in storage. All manure, debris and residue should be removed.

1. Remove the drain plug at the bottom of the fan housing.
2. Use a high pressure washer to remove all mud, manure, debris and residue from the outside of the Spreader.
3. Climb up the access ladder and wash out the discharge tube and the manhole cover. Reach in the tank and wash the area within reach. NEVER ENTER THE TANK without proper breathing equipment.

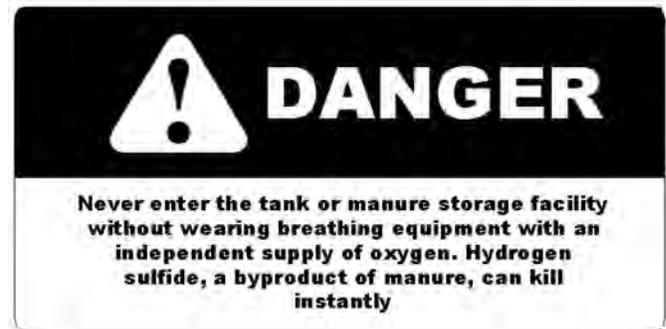

4. The fill hole/man hole is equipped with a 1 pc safety grate inside the funnel. Insure that this safety grate is securely installed to prevent anyone from entering the tank. The safety grate is also attached to the tank by a stainless steel cable. This Cable is not to be removed. Always keep safety grate in place.

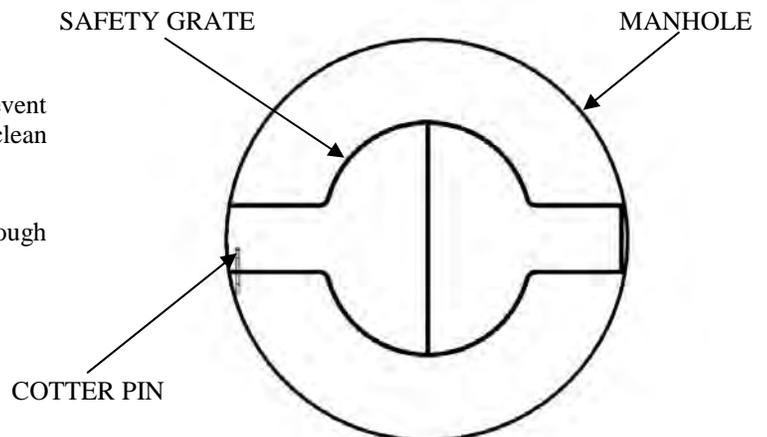


FIG. 5 MANHOLE GRATE

5. Be sure the machine is on level ground with the hitch lowered to allow the residue to drain out of the tank.
6. Be sure the discharge tube, fan and housing are cleaned.
7. Inspect all hydraulic hoses, lines, couplers and fittings. Tighten any loose fittings. Replace any hose that are badly cut, nicked, abraded or are separating from the crimped end of the fitting.
8. Lubricate all grease fittings (See Maintenance Section). Make sure that all grease cavities have been filled with grease to remove any water residue from the washing.
9. Touch up all paint nicks and scratches to prevent rusting.
10. Remove the wheels and grease using a HD wheel bearing grease. Mount the wheels.
11. Select an area that is dry, level and free of debris for storage.
12. When storing during freezing temperatures, be sure the fan housing and tank are drained of all liquid.
13. Do not allow children to play on or around the stored machine.

4.11.2 REMOVING FROM STORAGE

Before starting to use the machine, the customer should do a thorough inspection and servicing. Follow this procedure:

1. Lubricate all grease fittings to remove any condensation that accumulated during the storage period.
2. Torque all wheel bolts to the specified values.
3. Check the tire pressure. Add as required to bring to the specified level.
4. Install and tighten the drain plug on the bottom of the fan housing.
5. Attach to the tractor by following Section 4.06
6. Review and follow all items on the Pre-Operation Checklist before using.

5 SERVICE & MAINTENANCE

**MAINTENANCE SAFETY**

- 1. Stop tractor engine, place all controls in neutral, set park brake, remove ignition key and wait for all moving parts to stop before servicing, repairing, adjusting or unplugging.**
- 2. Be careful when working around a high-pressure hydraulic system. Wear the proper eye and hand protection when searching for leaks. Use a piece of wood or cardboard as a backdrop when searching for leaks.**
- 3. Seek immediate medical attention if hydraulic fluid pierces the skin as toxic reaction and infection could develop.**
- 4. Keep hands, feet, hair and clothing away from all moving or rotating parts.**
- 5. Make sure that all shields and guards are in place before operating.**
- 6. Clear the area of bystanders, especially children, when carrying out any maintenance or making adjustments.**
- 7. Always securely support the frame with stands or large blocks when removing a tire or working under the machine.**
- 8. Never enter a tank without wearing appropriate breathing equipment that carries an independent supply of oxygen. Keeps others out of tank.**

5.01 SERVICE

5.01.1 FLUIDS AND LUBRICANTS

1. Grease

Use an SAE multi-purpose high temperature grease with extreme pressure (EP) performance and containing at least 1.5% molybdenum disulfide. Also acceptable is an SAE multi-purpose lithium base grease.

2. Wheel Bearing Grease

Use a Heavy Duty wheel bearing grease at all times.

3. Storing Lubricants

Your machine can operate at top efficiency only if clean lubricants are used. Use clean containers to handle all lubricants. Store them in an area protected from dust, moisture and other contaminants.

5.01.2 GREASING

Refer to section 5.01.1 for recommended grease. Use the Maintenance Checklist provided to keep a record of all scheduled maintenance.

1. Use only a hand-held grease gun for all greasing. Air powered greasing systems can damage the seals on bearings and lead to early bearing failure.

2. Wipe grease fitting with a clean cloth before greasing, to avoid injecting dirt and grit.

3. Replace and repair broken fittings immediately.

4. If fittings will not take grease, remove and clean thoroughly. Also clean the lubricant passageway. Replace with a new fitting if necessary.

5.01.3 SERVICE INTERVALS

8 Hours or Daily:

1. Grease PTO Knuckles.
2. Grease PTO Shield

Annually:

1. Pull PTO apart.
 - a. Grease Telescope
 - b. Grease PTO Shield

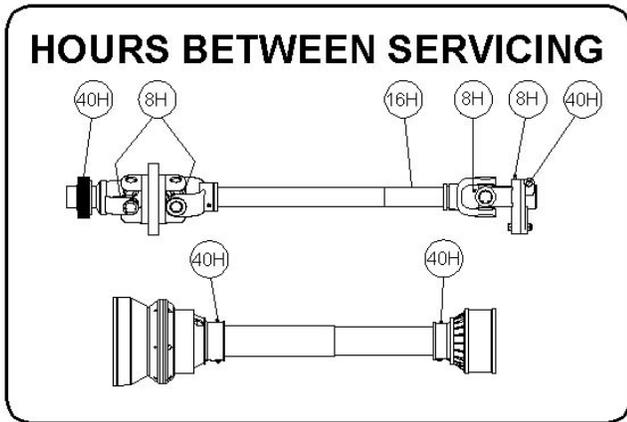


FIG. 6 PTO DRIVELINE SERVICING

3. Grease Fan Bearing Assembly.

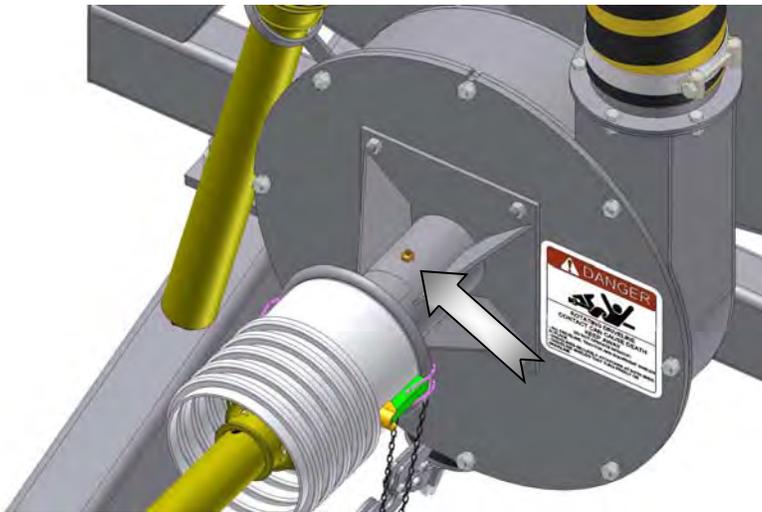


FIG. 7 BEARING ASSEMBLY GREASE

4. After each use, wash machine with a high-pressure washer.

5.01.4 SERVICING RECORD

See Lubrication and Maintenance sections for details of service. Copy this page to continue record.

ACTION CODE:  CHECK C CHANGE CL CLEAN
 L LUBRICATE R REPLACE

MAINTENANCE	HOURS																		
	SERVICED BY																		
8 HOURS																			
L PTO Driveline																			
L Fan Housing																			
 Tire Pressure																			
 Wheel Bolt Torque																			
20 HOURS																			
L PTO Driveline																			
 Tire Pressure																			
 Wheel Bolt Torque																			
40 HOURS																			
L PTO Driveline																			
 Tire Pressure																			
 Wheel Bolt Torque																			
100 HOURS OR ANNUALLY																			
L Wheel Bearings																			
CL Machine																			
 Tire Pressure																			
 Wheel Bolt Torque																			

5.02 MAINTENANCE

The efficient and safe operation of your Husky Liquid Manure Spreader will depend to a great degree on your diligence in following the maintenance and adjustment procedures outlined in this section. If you follow these recommendations, your Spreader should work to its maximum potential.

5.02.1 PTO SAFETY SHIELD MAINTENANCE

It is important that the shield components rotate freely over the PTO shaft. Lubricating both the shield bearings and also periodic cleaning will ensure safe operation of the rotating shield. To disassemble, clean and lubricate the shield, follow this procedure:

- A. Press down the collar bearing catches with a screw driver to release the cone. Pull the cone towards the tube to remove it.
- B. Spread the collar bearing and remove from the tube. Clean collar and the yoke bearing groove. After cleaning thoroughly, apply a good coat of grease to the bearing groove.
- C. Fit the collar bearing into the groove and the tube ensuring that the collar catches are centered over the matching holes. The tube and bearing must rotate freely in the bearing groove.
- D. Fasten the cone by lining up the cone grease fitting over the grease filling hole on the collar bearing. Make sure that all catches are fastened and that the shield turns freely over the shaft.

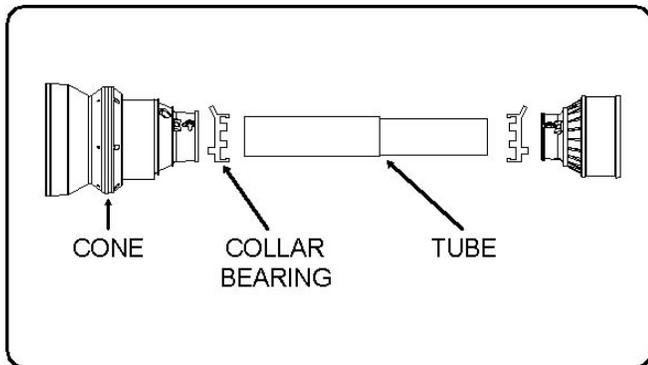


FIG. 6 DRIVELINE SHIELD

5.02.2 PTO DRIVELINE SHEAR PIN

The PTO driveline is equipped with a shear pin to prevent damage to the mechanical drive should an object jam in the fan.

Follow this procedure when replacing the shear pin:

1. Stop tractor engine, place all controls in neutral, set parking brake, remove ignition key and wait for all moving parts to stop before dismounting.
2. Remove the ends of the shear bolt from each part of the yoke. It may be necessary to tap out the bolts with a punch if the end is distorted.




3. *What to check for on the brass bearing and thrust washer type of shear flange assembly:* Check that the brass bearing is not worn. Check that the thrust washer is in place and not worn or missing. Check the snap ring that it is correctly seated in the groove.
4. *What to check for on the ball bearing shear flange assembly:* Check that all the balls are in the cavity. Ensure that the grease fitting is in place and tight to hold all the balls in the proper location. If the shear flange was allowed to rotate several times, then the ball grooves on the inner and outer parts should be checked for wear or fracture.
5. Line up the bolt hole and install the shear bolt recommended by the manufacturer.
6. Tighten the shear bolt securely in position.
7. Determine the cause of the bolt shearing. Remove the cause before using the machine again.

5.02.3 UNLOADING FAN MAINTENANCE

During the life of the machine, various components of the unloading fan system can be damaged or need repair. To gain access to these components, proceed in this manner:

1. Stop tractor engine, place all controls in neutral, set park brake, remove ignition key and wait for all moving parts to stop before adjusting or repairing the machine.
2. Remove the implement PTO yoke and lay to the side.

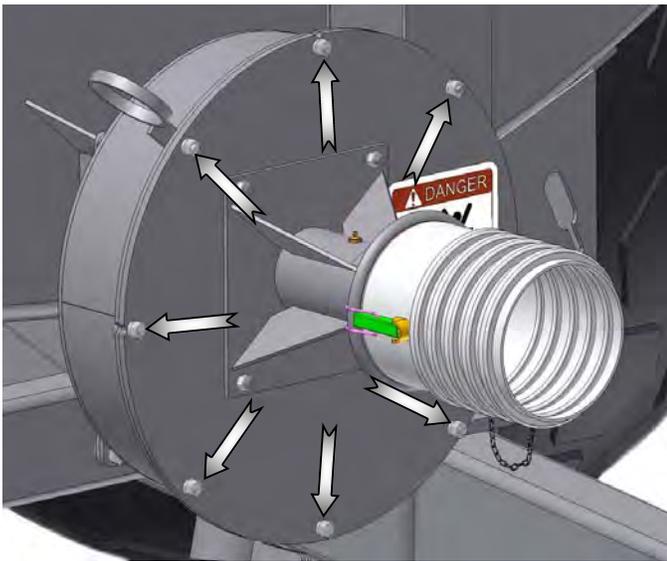

3. Remove the mounting bolts in the fan housing,
4. Pull the entire assembly out of the housing.
5. Replace parts as required.
6. Install the assembly into the housing.
7. Tighten the mounting bolts.
8. Install the PTO driveline.
9. Make sure all shields are secured in position.

5.02.4 GREASING WHEEL BEARINGS

Follow this procedure when greasing the wheel bearings:

1. Be sure the tank is empty.
2. Jack up the axle assembly and place stands or blocks under the frame.
3. Remove the hub to expose the bearings.
4. Add more grease to the bearings.
5. If the grease appears to be dirty and contaminated, wash the bearings, axle and cavity using a good solvent.
6. Liberally apply grease to all the components.
7. Install the hub back on the shaft and secure in position.
8. Remove the blocks & lower to the ground.

6 TROUBLESHOOTING

The Husky Farm Equipment Manure Spreader is a simple transportable tank that is used to move slurry from the holding tank to the field, where it is evenly distributed. It is a reliable system that requires minimal maintenance.

In the following troubleshooting section, we have listed many of the problems, causes and solutions to the problems which you may encounter.

If you encounter a problem that is difficult to solve, even after having read through this troubleshooting section, please call your local Husky dealer or the factory. Before you call, please have this Operator's Manual and the serial number from your Spreader ready.

PROBLEM	CAUSE	SOLUTION
Spreader does not track behind tractor.	Loose wheel bolts. Low tire pressure.	Torque wheel bolts to specified level Increase tire pressure.
Fan doesn't run	Broken shear bolt. Object stuck in fan	Replace shear pin. Check for cause of failure. Remove cause. Remove fan & dislodge object.
Fan runs too slow	Low grease level. Wrong hydraulic system. Inadequate hydraulics.	Add more grease Hydraulics don't match motor requirements. Change tractors.
Poor spreading pattern	Incorrect fan speed Manure too thick	Check PTO rpm. Change tractors if necessary. Match oil flow rate. Add water

7 SPECIFICATIONS

7.01 MECHANICAL—ELITE SPREADER

LITRES	7000	9000	12000	14000	15000	18000	23000	28000
Gallons (US)	1800	2400	3000	3600	4000	5000	6000	7400
Tank Length	12 ft.	12 ft.	14 ft.	14 ft.	15 ft.	15 ft.	19 ft.	23 ft.
Tank Diameter	60 in.	72 in.	62" x 86" Oval	70" x 90" Oval	70" x 90" Oval	78" x 100" Oval	78" x 100" Oval	78" x 100" Oval
Approx. Ht. Overall	96 in.	108 in.	104 in.	120 in.	120 in.	120 in.	120 in.	120 in.
Tire Size	16.5 L x 16.1	16.5 L x 16.1 21.5 L x 16.1 28 L x 26	18 x 22.5 21.5 x 16.1 18.4 L x 26 700/50-26.5 28 L x 26	18 x 22.5 21.5 x 16.1 18.4 L x 26 700/50-26.5 28 L x 26	18 x 22.5 21.5 x 16.1 18.4 L x 26 700/50-26.5 28 L x 26	18.4 L x 26 28 L x 26 30.5 L x 32	30.5 L x 32 35.5 x 32	35.5 x 32
Drive	PTO/HYD	PTO/HYD	PTO/HYD	PTO/HYD	PTO/HYD	PTO/HYD	PTO/HYD	PTO/HYD
Approx. Wt of Spreader	4200 lbs	4500 lbs	5500 lbs	7100 lbs	7900 lbs	10500 lbs	17000 lbs	19100 lbs
Approx. Wt of Loaded Spreader	9.5 ton	12.5 ton	14.5 ton	18 ton	19 ton	25.25 ton	31.5 ton	37.5 ton
Tractor Size Suggested	75 hp	90 hp	100 hp	125 hp	140 hp	150 hp	200 hp	200+ hp
Axle Type	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem	Tandem
Brakes	optional	optional	optional	optional	optional	optional	optional	optional

7.02 MECHANICAL—SLIMLINE SPREADER

LITRES	18000	23000	28000
Gallons (US)	5000	6000	7400
Tank Length	18 ft.	22 ft.	26.5 ft.
Tank Diameter	n/a	n/a	n/a
Approx Ht. Overall	116 in.	130 in.	133 in.
Tire Size	28L x 26 30.5 x 32	30.5 x 32 35.5 x 32	35.5 x 32
Drive	PTO/HYD	PTO/HYD	PTO/HYD
Approx. Wt of Spreader	11500 lbs	23000 lbs	28000 lbs
Approx. Wt of Loaded Spreader	26 ton	32 ton	38 ton
Tractor Size Suggested	150 hp	200 hp	200+ hp
Axle Type	Tandem	Tandem	Tandem
Brakes	optional	optional	optional

7.03 TIRE OPTIONS

TIRE SIZE	TIRE TYPE	P.S.I.	KPA
16.5L x 16.1	Implement Tires	35	241
21.5L x 16.1		35	241
18 x 22.5	Truck Tires	65	448
23.1 x 26	Turf Tires	24	166
28L x 26		24	166
30.5 x 32		24	166
35.5 x 32		32	220

7.04 WHEEL BOLT TORQUE

WHEEL BOLT SIZE	TORQUE FT. LBS		KG - METER	
	DRY	OILED	DRY	OILED
9/16 - 18 NF	120.00	90.00	16.50	12.44
5/8 - 18 NF	240.00	180.00	33.18	24.89
3/4 -18 NF	420.00	310.00	58.07	42.86

8 INDEX

	A	PAGE		PAGE
Attachment to Tractor		16		
	B			
Break - In		14		
	C			
Clean-Up		19		
	E			
Equipment Matching		15		
Employee Sign-Off Form		11		
	F			
Fluids and Lubricants		21		
	G			
General Safety		07		
Greasing		21		
Greasing Wheel Bearings		25		
Guarantee		02		
	H			
How the Machine Works		13		
Hydraulic Safety		09		
	I			
Index		28		
Introduction		05		
Installation of Safety Decal		10		
	M			
Maintenance		24		
Maintenance Safety		08		
Manure Storage Facility Safety		10		
Mechanical Specifications—Elite		26		
Mechanical Specifications—Slimline		27		
	O			
Operation		13		
Operating Safety		08		
Operator Orientation		05		
	P			
Parts Book		28		
Placing in Storage		19		
Pre-Operation Checklist		14		
Principals of Operation		13		
PTO Driveline Shear Pin		24		
PTO Safety Shield Maintenance		24		
			R	
			Removing from Storage	20
			S	
			Safety	07
			Safety Alert Symbol	06
			Safety Decal	10
			Safety Decal Locations	12
			Serial Number Location	04
			Service	21
			Service and Maintenance	21
			Service Record	23
			Service Intervals	22
			Sign-Off Form	11
			Specifications	26
			Storage	19
			Storage Safety	10
			T	
			Table of Contents	03
			Tire Options	27
			Tire Safety	10
			To the New Operator or Owner	13
			Towing	17
			Tractor Horsepower Requirements	15
			Transport Safety	09
			Trouble Shooting	26
			U	
			Unloading Fan Maintenance	25
			Unloading the Spreader	18
			W	
			Wheel Bolt Torque	27

9 PARTS BOOK

The Parts Book with a list of all the parts on your spreader is enclosed with this manual at the time you purchase the spreader new.

Contact your local dealer or the factory if you need a copy of the parts book or you need a new copy of this operator's manual

At the time of printing there is no charge for these books to an owner of Husky Liquid Manure Equipment.

HUSKY FARM EQUIPMENT LIMITED

7440 Wellington County Rd #17

R.R. # 2 Alma

Ontario, Canada

N0B 1A0

Phone(519) 846-5329

Fax (519) 846-9378